



Part Number: CUPE002A612

**Magnetic Reed Relay - Two pole - Form A - Mercury Wetted
Product Data Sheet**

DIMENSIONS

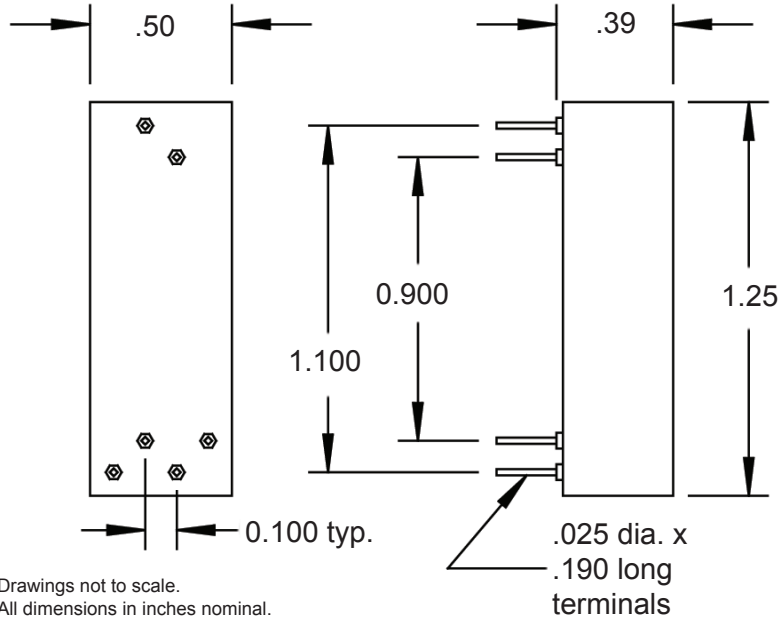

CIRCUIT DIAGRAM

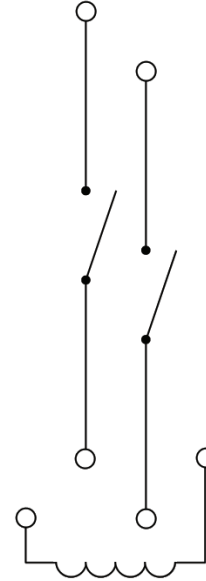

TERMINALS / TOLERANCE

Diameter: 0.025
Length: 0.190

Tolerance: .XXX = $\pm .010$
.XX = $\pm .020$

FEATURES

- Resistant to Ambient Environmental Conditions
- Material : Plastic
- Mechanical Stress Resistant
- Antivibration Feature
- Magnetic Shield

SPECIFICATION

Maximum Switching Power	VA / Watts	30
Maximum Switching Current	Amps AC/DC	0.75
Maximum Switching Voltage	Volts AC/DC	350
Breakdown Voltage	Volts AC	1000
Coil Resistance (+/- 10% @25°C)	Ohms	600
Nominal Coil Voltage	VDC	12
Maximum Coil Voltage	VDC	30
Pull-in Voltage MAX	VDC	9.0
Drop-out Voltage MIN	VDC	1.5
Dielectric	coil / case	N/A
	coil / cont	2000 VAC
	cont / cont	1000 VAC

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone: (1) 973 777 6900

www.comus-intl.com

Fax: (1) 973 777 8405