



Part Number: HGRM-55211-P00

Magnetic Reed Relay - One pole - Form C - Mercury wetted contact
Product Data Sheet

DIMENSIONS

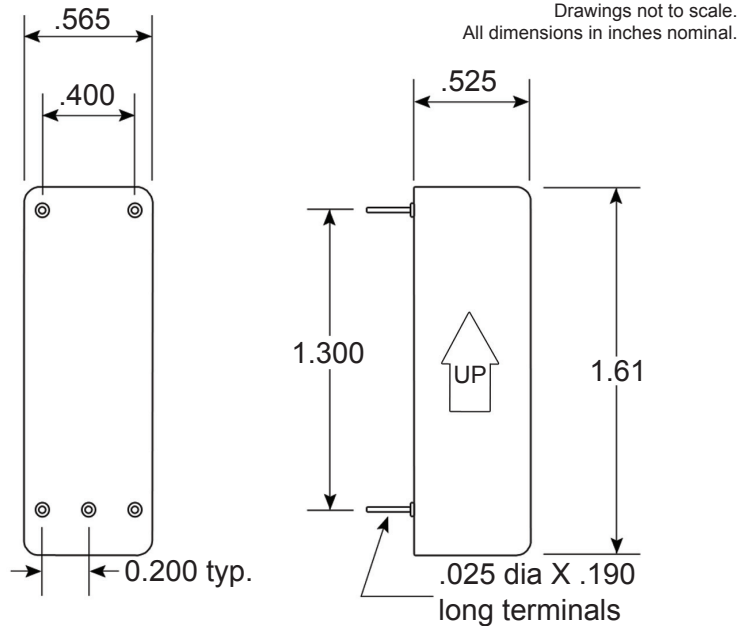

CIRCUIT DIAGRAM

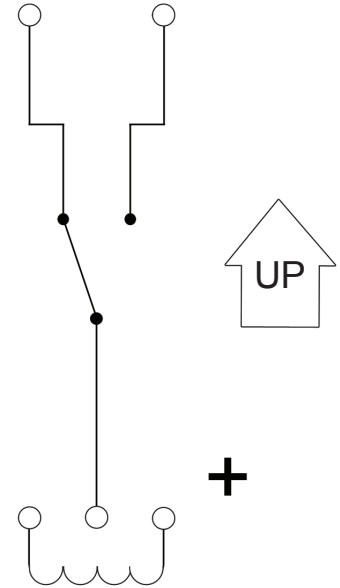

TERMINALS

Diameter: 0.025
Length: 0.190

FEATURES

- Resistant to Ambient Environmental Conditions
- Material : Metal
- Mechanical Stress Resistant
- Antivibration Feature
- Magnetic Shield

SPECIFICATION

Maximum Switching Power	VA / Watts	100
Maximum Switching Current	Amps AC/DC	2.0
Maximum Switching Voltage	Volts AC/DC	500
Breakdown Voltage	Volts AC	1000
Coil Resistance (+/- 10% @25°C)	Ohms	680
Nominal Coil Voltage	VDC	12
Maximum Coil Voltage	VDC	35
Pull-In Current MAX	MADC	7.5
Drop-Out Current MIN	MADC	1.7
Pull-In Voltage MAX	VDC	5.7
Dielectric	coil / case	1000
	coil / cont	1000
	cont / cont	1000

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone: (1) 973 777 6900

www.comus-intl.com

Fax: (1) 973 777 8405