


Part Number: MRB-1N-12U

Magnetic Reed Relay - Two pole - One Form A, One Form B - 12 VDC


Product Data Sheet

DIMENSIONS

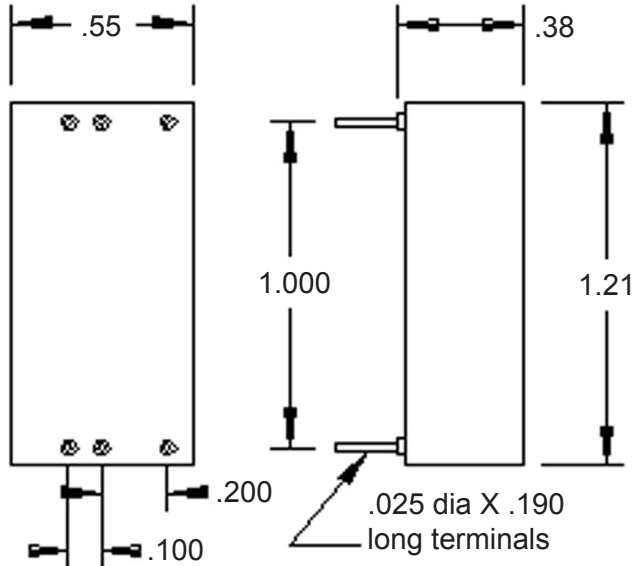

Drawings not to scale.
All dimensions in inches nominal.

CIRCUIT DIAGRAM

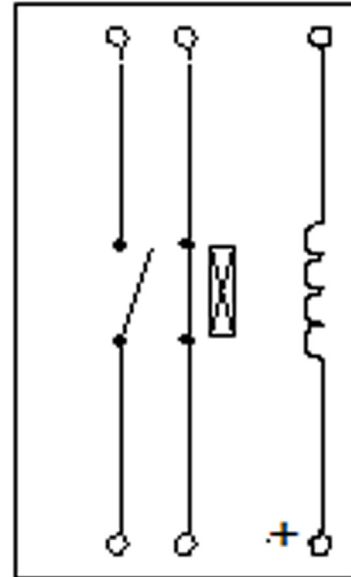

TERMINALS

Diameter: 0.025 Tolerances:
Length: 0.190 .XXX = ± .010
Centers: 0.100 x 1.000 .XX = ± .020

FEATURES

- Resistant to Ambient Environmental Conditions
- Material : Plastic
- Mechanical Stress Resistant
- Antivibration Feature
- Magnetic Shield

SPECIFICATION

Maximum Switching Power	Watts	10
Maximum Switching Current	Amps DC	0.50
Maximum Switching Voltage	Volts DC	200
Breakdown Voltage	Volts DC	350
Coil Resistance (+/- 10% @25°C)	Ohms	230
Nominal Coil Voltage	VDC	12
Maximum Coil Voltage	VDC	18
Pull-In Voltage MAX	VDC	9.0
Drop-Out Voltage MIN	VDC	1.0
Dielectric	coil / case	N/A
	coil / cont	350 VDC
	cont / cont	350 VDC

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone: (1) 973 777 6900

www.comus-intl.com

Fax: (1) 973 777 8405

Belgium: + 32 (0)12 390400 - Assentech, UK: +44 (0) 1255 862236 - Germany: +49 (0)911 923 15 943
©2011 Copyright Comus International, 454 Allwood Road, Clifton NJ 07012, USA

An ISO 9001 Certified Company