

**Part Number: PPS 150**  
**Reed Switch - Polypropylene Moulded**  
**Product Data Sheet**

**PICTURE**




**FEATURES**

- Reed switch moulded in polypropylene case
- Maximum mechanical protection
- Minimum ingress of dust and moisture
- Meets IP65 requirements

✓ **RoHS Compliant**

**DIMENSIONS**

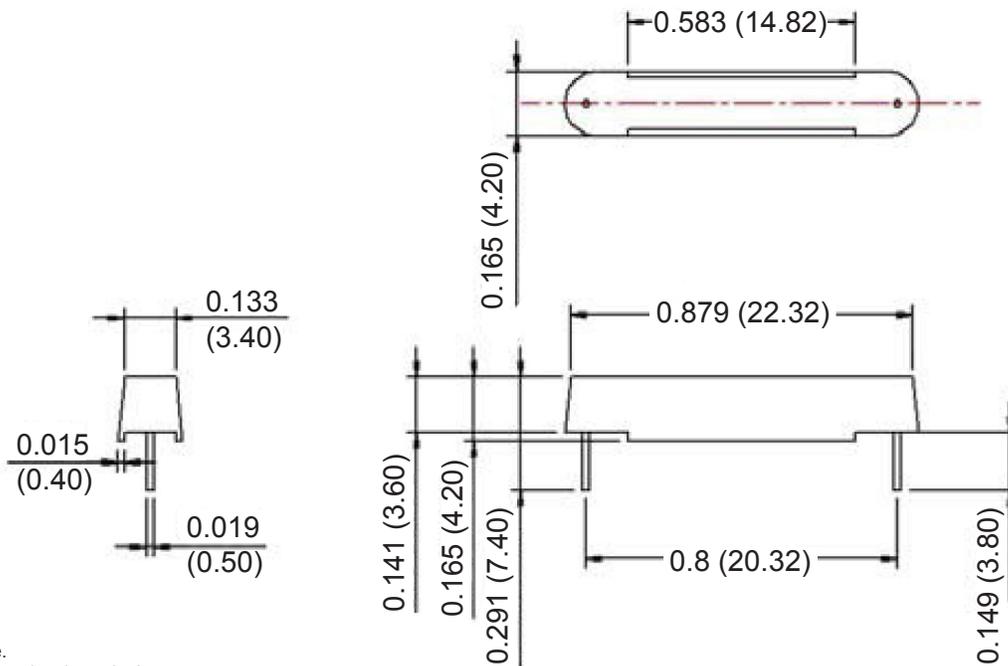

Drawings not to scale.  
 All dimensions in inches (mm) nominal.

**SPECIFICATION**

Contact Form		Normally Open
Switching Voltage	MAX AC	150 V
Switching Current	MAX	0.5 A
Switching Capacity (Resistive)	MAX	10 VA
Operate AT Range	PI	8 - 10 AT
Contact Resistance	MAX	150 mΩ
Operating Temperature		-40 to 110°C
Switching Distance		Dependent on magnet
Case Material		Polypropylene

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

**Phone: (1) 973 777 6900**

**www.comus-intl.com**

**Fax: (1) 973 777 8405**