

Part Number: PPS 470 (Alternate Part No: S1326)
Housed Reed Switch
Product Data Sheet

PICTURE




FEATURES

- Resistant to Ambient Environmental Conditions
- Hermetically Sealed & Inert Gas Filled
- Case Material : Polypropylene

✓ RoHS Compliant

DIMENSIONS

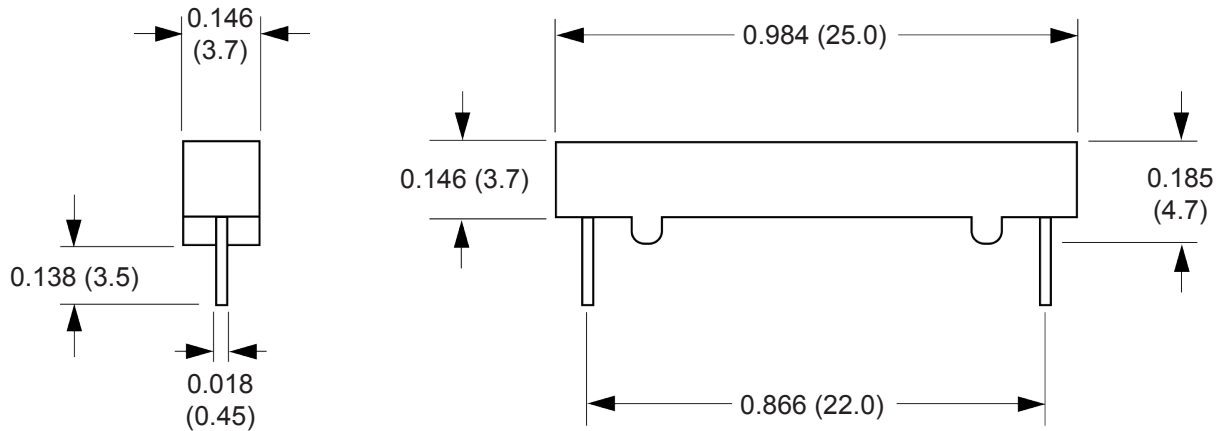

Drawings not to scale.
 All dimensions in inches (mm) nominal.

SPECIFICATION

Contact Form / Style		Normally Open
Switching Voltage	Max. VAC	470
Switching Current	Max. A	0.5
Switching Capacity	Max. VA	10
Contact Resistance	Max. mΩ	150
Switching Distance	Min. mm	Dependant on magnet
Operating Temperature	Deg °C	-20° to +70°
Storage Temperature	Deg °C	-25° to +70°

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone: (1) 973 777 6900 **www.comus-intl.com** **Fax: (1) 973 777 8405**

Belgium: + 32 (0)12 390400 - Comus Europe Ltd (Assemblech) UK: +44 (0) 1255 862236 - Germany: +49 (0)911 923 15 943 - Netherlands: +31(0)45 54 39 345 - India: +(91) (44) 43219090
 ©2015 Copyright Comus International, 454 Allwood Road, Clifton NJ 07012, USA