


Magnetic Contact Switches


Specification: MCS-118 Series

- *Adjustable screw plunger with flange
- *3/8" diameter press to fit
- *Single drink hole
- *18"#22AWG Leads or screw terminal
- *Special leads available
- *Screws included
- *Colours: White, Brown or Grey

Plunger Switch

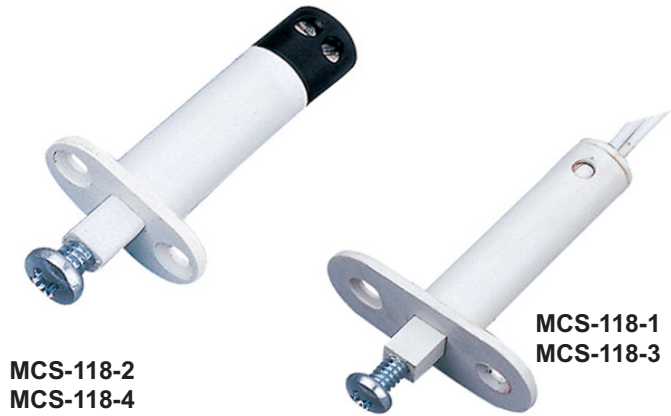

Dimensions (mm)

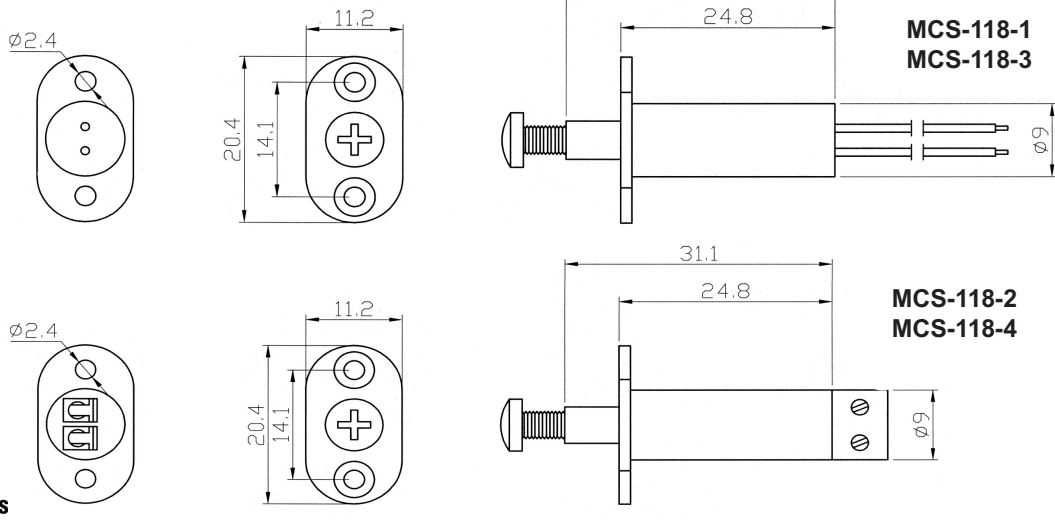

Order Information X denotes colour W=White, B=Brown, G=Grey

Part Number	Loop Type	Reed Form	Gap total travel Inch (mm)	Max Initial Contact Resistance (Ohm)	Max Contact rating (W)	Max Switching Voltage (VDC/VAC)	Max Switching Current (A)
MCS-118-1X	Closed	N/O	1/4 (6.2)	0.150	10	100	0.5
MCS-118-2X	Closed	N/O	1/4 (6.2)	0.150	10	100	0.5
MCS-118-3X	Open	N/C	1/4 (6.2)	0.150	3	30	0.2
MCS-118-4X	Open	N/C	1/4 (6.2)	0.150	3	30	0.2

Note: Total travel: 0.244" (6.2mm) Pre travel .11 +/- .04" (2.80+/- 1.00mm) Wire range for terminal #20- #24 AWG



ISO 9001:2008
Certificate No. FM21080

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone : +44 (0)1255 862236 www.comus-intl.com Fax: +44 (0)1255 862014

©2015 Copyright Comus Europe Ltd, Unit 7, Rice Bridge Industrial Estate, Thorpe - Le - Soken, Essex, CO16 0HL, ENGLAND.
USA: + 1 973 777 6900 - Belgium: + 32 (0)12 390400 - France: + 33 (0) 1 43 96 86 10