



Proximity Switch - Reed Switch based - Rectangular

Change Over Contacts


Part Number: MMPSC 130/300 **Suggested Magnet: MMPSM**

Product Data Sheet


PICTURE



DIMENSIONS



Drawings not to scale All dimensions in mm nominal

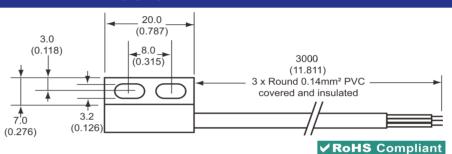

SPECIFICATION			
Contact Form / Style		Change Over	
Switching Voltage	Volts DC Max	175	
Breakdown Voltage	Volts Min	200	
Switching Current	Amps DC Max	0.4	
Carry Current	Amps DC Max	0.5	
Switching Power	Watts Max	5	
Contact Resistance	Ohms	>1	
Operating Temperature	_	-20°C to +70°C	

Applications Include

- Position and limit sensing.
- Linear actuators.
- Security system switch.
- Door Switch.

Features

- 3 core black cable with internal colours White / Brown / Green.
- Black right hand entry Nylon 66 housing
- IP67 and IP65 rated

Did you know we also sell?













Rev. No.	Revision Note	Date	Signature	
1	Datasheet Created	02-11-18	HC	



As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing

Phone: +44 (0)1255 862236

www.comus-intl.com

Fax: +44 (0)1255 862014