


Part Number: AS1303-1
Shock / Acceleration Switch
Product Data Sheet

PICTURE



OPERATION

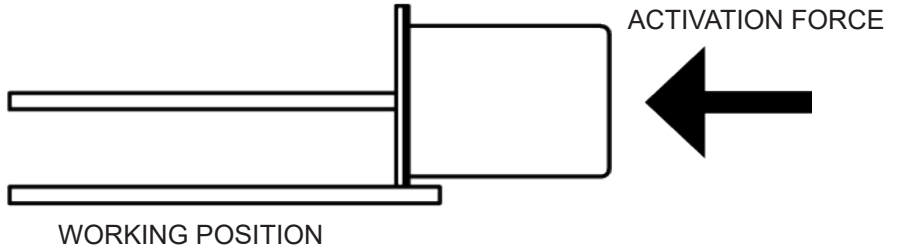


FEATURES

- Resistant to Severe Environmental Conditions
- Case Material Steel-Tin Plated
- Mechanical Stress Resistant
- Hermetically Sealed & Inert Gas Filled

✓ RoHS Compliant

DIMENSIONS

Drawings not to scale.
 All dimensions in inches (mm) nominal.

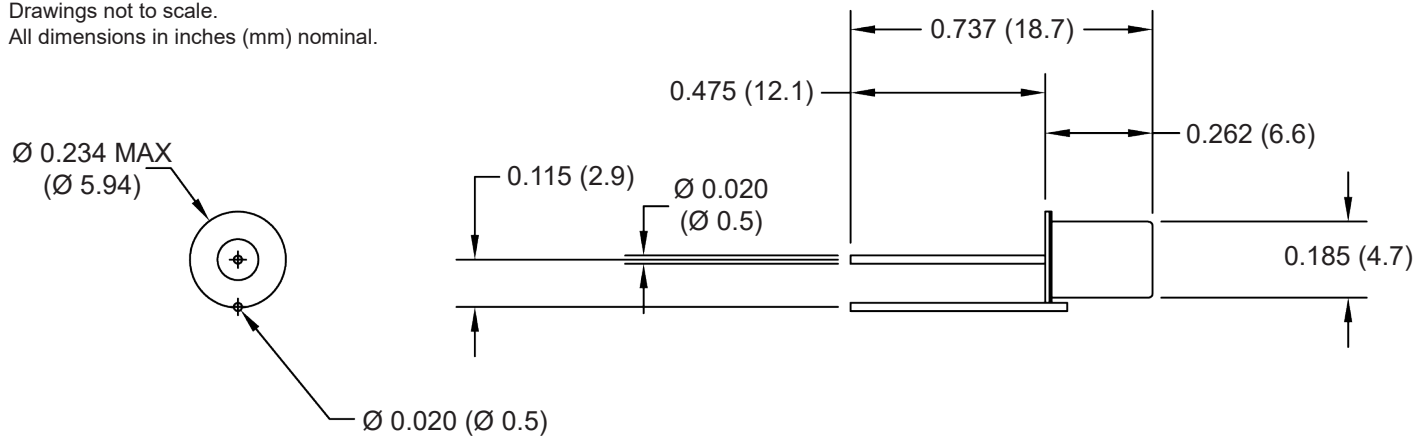

SPECIFICATION

Contact Form / Style	Normally Open
Contact Capacity	24 VDC MAX, 0.25 A MAX, 3 VA. MAX
Contact Resistance	20 OHMS MAX
Activation Level	3.0 - 9.0 G
Operating Temperature	-40° +150°C
Storage Temperature	-54° +200°C

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone: (1) 973 777 6900 **www.comus-intl.com** **Fax: (1) 973 777 8405**