


## Part Number: 3570 1333 Instrumentation Grade SIP - 1 Form A Product Data Sheet

### PICTURE



✓ RoHS Compliant

### FEATURES


- High Reliability Instrumentation Grade reed switch with sputtered Ruthenium contacts.
- SIP 1 Form A - 10 W dry reed relays
- Ideal for test and instrumentation applications.
- High Insulation Resistance :  $10^{12} \Omega$  MIN
- Molded thermoset industry standard package.
- Optional internal coil suppression diode.
- UL File E125629

### ORDERING INFORMATION


Series	Coil	Options
3570.1333.	05	1 = no diode
	12	3 = with diode

**Part Number Example:** 3570.1333.xxx  
3570.1333.051 = 5 volt coil, no diode

### SCHEMATIC

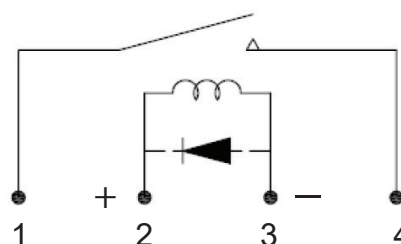

### DIMENSIONS

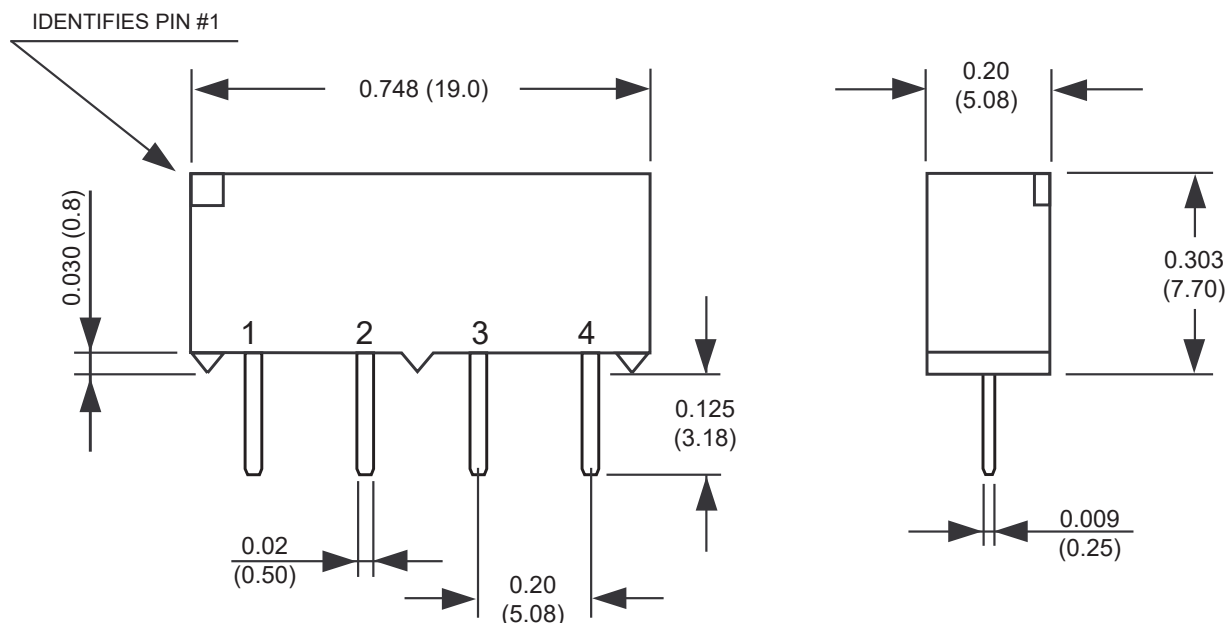

Drawings not to scale.  
All dimensions in inches (mm) nominal.

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

**Phone: (1) 973 777 6900**

**www.comus-intl.com**

**Fax: (1) 973 777 8405**

Comus Europe Ltd (Assemtech) UK: +44 (0) 1255 862236 - Italy: +39 347 6429017 - Netherlands: +31(0)45 54 39 345  
©2025 Copyright Comus International, 454 Allwood Road, Clifton NJ 07012, USA

**Part Number: 3570 1333**  
**Instrumentation Grade SIP - 1 Form A**  
**Product Data Sheet**

### COIL DATA-STANDARD TYPE 1 FORM A (at 20°C)

NOMINAL COIL VOLTAGE (VDC)	NOMINAL COIL RESISTANCE $\pm 10\%$ ( $\Omega$ )	MAX OPERATE VOLTAGE (VDC)	MIN RELEASE VOLTAGE (VDC)	MAX COIL VOLTAGE (VDC)
5	500	3.75	0.8	7
12	1000	9	1	16

### CONTACT RATING

Max Switching Power	10 W
Max Switching Voltage	200 VDC
Max Switching Current	0.5 A
Max Carry Current	1.5 A

### SPECIFICATION

Contact Resistance (Initial)	MAX 150 m $\Omega$
Operate Time - including bounce (Typical)	0.35 ms (At Nominal Voltage)
Release Time (Typical)	0.1 ms
Insulation Resistance @ 100V, 20°C, 40% RH (MIN)	10 <sup>12</sup> $\Omega$
Dielectric Strength (MIN)	Between Open Contacts 200 V DC / peak AC Between Coil to Contacts 1500 V DC / peak AC
Capacitance Between Open Contacts (Typical)	0.5 pF
Vibration	20G
Shock	50G
Operating Temperature	-40° +85°C
Storage Temperature	-40° +100°C
Life Expectancy of Electrical	1000 x 10 <sup>6</sup> ops (1 VDC, 10mA)

### SOLDERING THROUGH-HOLE

The attachment method is typically eutectic soldering. RoHS requires solder with no elemental lead (Pb). SAC alloy (96,5Sn / 3AG / 0,5Cu) is the most popular choice. Reed relays can be soldered by hand or by wave solder processing. Comus International recommends the maximum wave solder temperature (measured at the reed relay leads) as 270°C for 10 seconds. Temperature and time in excess of the recommended levels may result in damage to the reed relay. All of our through-hole reed relays will be compatible with either SAC alloy or eutectic soldering process.

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

**Phone: (1) 973 777 6900**

**www.comus-intl.com**

**Fax: (1) 973 777 8405**

Comus Europe Ltd (Assemtech) UK: +44 (0) 1255 862236 - Italy: +39 347 6429017 - Netherlands: +31(0)45 54 39 345  
 ©2025 Copyright Comus International, 454 Allwood Road, Clifton NJ 07012, USA