

Part Number: PTB 130/30 (Alternate Part No: S1496)
Proximity Switch - Reed Switch based
Threaded - Normally Closed Contacts - Suggested Magnet: PRM

PICTURE



✓RoHS Compliant


APPLICATIONS

- Position and limit sensing
- Linear actuators
- Security system switch
- Door Switch

OPTIONS

- M6 Thread.
- Custom cable lengths, strip lengths, cable types, terminations.
- If you do not see what you need, just ask, as there is a strong possibility we can do it !
- Device is intended to be mounted in an enclosure under UL recognition.

DIMENSIONS

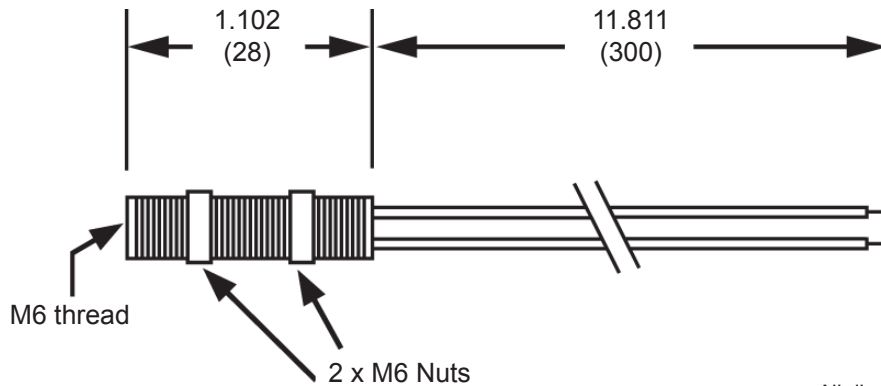

Drawings not to scale.
 All dimensions in inches (mm) nominal.

SPECIFICATION

Contact Form / Style	Normally Closed
Switching Capacity (Resistive)	5 W/VA Max.
Switching Voltage	100 VAC Max.
Switching Current	0.5 A. Max.
Carry Current	1.0 A. Max.
Breakdown Voltage	200 VDC Min.
Contact Resistance	150 mOhms Max.
Switching Distance	3 mm Min.
Operating Temperature Range	-20°C +85°C
Storage Temperature Range	-25°C +90°C
Case Material	Brass-Nickel Plated
Cable	2 x Round 0.22mm ² PVC Insulated Brown / White

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone: (1) 973 777 6900 www.comus-intl.com Fax: (1) 973 777 8405