

RI-48GP Series Dry Reed Switch

20.5 mm, 1 Form A, 70 Watt



RI-48GP Series


Micro dry-reed switch hermetically sealed in a gas-filled glass envelope. Single-pole, single-throw (SPST) type, having normally open contacts, and containing two magnetically actuated reeds.

The switch is of the double-ended type and may be actuated by an electromagnet, a permanent magnet or a combination of both. The device is intended for use in relays for switching power loads and high stand-off voltage applications.

RI-48GP Series Features

- Perfect heavy load switch
- Can handle loads up to 70 Watts
- Contact layers: gold, sputtered ruthenium
- Superior glass-to-metal seal and blade alignment
- Excellent life expectancy and reliability
- UL File #E125629

Dimensions for RI-48GP Series

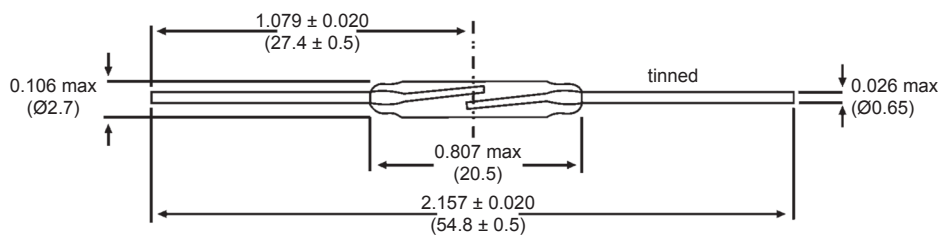

All Dimension in inches (mm) nominal

General data for all models RI-48GP

AT-Customization / Performed Leads

Besides the standard models, customized products can also be supplied offering the following options:

- Operate and release ranges to customer specification
- Cropped and/or performed leads

Life expectancy and reliability

The life expectancy data given below are valid for a coil energized at 1.5 times the published maximum operate value for each type in the RI-48GP series.

No load conditions (operating frequency: 100Hz)

Life expectancy: min. 10^8 operations with a failure rate of less than 10^{-9} with a confidence level of 90%.

End of life criteria:

- Contact resistance > 1Ω after 2 ms
- Release time > 2 ms (latching or contact sticking).

Loaded conditions (resistive load: 20 V; 500 mA; operating frequency: 125 Hz)

RI-48GP (≤ 20 AT)

Life expectancy: min. 10^7 operations with a failure rate of

less than 10^{-8} with a confidence level of 90%.

End of life criteria:

- Contact resistance > 2Ω after 2.5 ms
- Release time > 2.5 ms (latching or contact sticking).

RI-48GP (≥ 20 AT)

Life expectancy: min. 2.5×10^7 operations with a failure rate of less than 10^{-8} with a confidence level of 90%.

End of life criteria:

- Contact resistance > 2Ω after 2.5 ms
- Release time > 2.5 ms (latching or contact sticking).

Loaded conditions (resistive load: 100 V-700 mA; operating frequency: 20 Hz)

RI-48GP (≥ 25 AT)

Life expectancy: min. 3×10^5 operations with a failure rate of less than 10^{-6} with a confidence level of 90%.

End of life criteria:

- Contact resistance > 1.5Ω after 2.5 ms.
 - Release time > 2.5 ms (latching or contact sticking).
- Switching different loads involves different life expectancy and reliability data. Further information is available on request.

Technical Specifications

Parameters	Test Conditions	Units	RI-48GP-XXXX			
Operating Characteristics						
Operate Range		AT*	15-20	20-25	25-30	30-35
Release Range		AT*	8-16	13-20	18-24	23-31
Operate Time - including Bounce (typ.)		ms	0.35	0.35	0.35	0.35
Bounce Time (typ.)		ms	0.15	0.15	0.15	0.15
Release Time (max)		μs	30	30	30	30
Resonant Frequency (typ.)		Hz	3200	3200	3200	3200
Electrical Characteristics						
Switched Power (max)		W	70	70	70	70
Switched Voltage DC (max)		V	200	200	200	200
Switched Voltage AC, RMS value (max)		V	250	250	250	250
Switched Current DC (max)		mA	1000	1000	1000	1000
Switched Current AC, RMS value (max)		mA	1000	1000	1000	1000
Carry Current DC (max)		A	1.75	2.25	2.25	2.25
Breakdown Voltage (min)		V	400	400	580	580
Contact Resistance (initial max.)		mΩ	90	90	90	90
Contact Resistance (initial typ.)		mΩ	60	60	60	60
Contact Capacitance (max)	without test coil	pF	0.2	0.2	0.2	0.2
Insulation Resistance (min)	RH ≤ 45%	MΩ	10 ⁶	10 ⁶	10 ⁶	10 ⁶

*AT values are based on full length, measured using Philips Standard Coil (PSC).

Parameters	Test Conditions	Units	RI-48GP-XXXX			
Operating Characteristics						
Operate Range		AT*	35-40	40-45	45-50	50-55
Release Range		AT*	28-36	33-41	38-46	43-51
Operate Time - including Bounce (typ.)		ms	0.35	0.35	0.35	0.35
Bounce Time (typ.)		ms	0.15	0.15	0.15	0.15
Release Time (max)		μs	30	30	30	30
Resonant Frequency (typ.)		Hz	3200	3200	3200	3200
Electrical Characteristics						
Switched Power (max)		W	70	70	70	70
Switched Voltage DC (max)		V	200	200	200	200
Switched Voltage AC, RMS value (max)		V	250	250	250	250
Switched Current DC (max)		mA	1000	1000	1000	1000
Switched Current AC, RMS value (max)		mA	1000	1000	1000	1000
Carry Current DC (max)		A	2.25	2.25	2.25	2.25
Breakdown Voltage (min)		V	580	580	780	780
Contact Resistance (initial max.)		mΩ	90	90	90	90
Contact Resistance (initial typ.)		mΩ	60	60	60	60
Contact Capacitance (max)	without test coil	pF	0.2	0.2	0.2	0.2
Insulation Resistance (min)	RH ≤ 45%	MΩ	10 ⁶	10 ⁶	10 ⁶	10 ⁶

*AT values are based on full length, measured using Philips Standard Coil (PSC).

Mechanical Data

Contact arrangement is normally open; lead finish is tinned; net mass is approximately 280mg; and can be mounted in any position.

Shock

The switches are tested in accordance with "IEC 68-2-27", test Ea (peak acceleration 500 G, half sinewave; duration 11 ms). Such a shock will not cause an open switch (no magnetic field present) to close, nor a switch kept closed by an 80 AT coil to open.

Vibration

The switches are tested in accordance with "IEC 68-2-6", test Fc (acceleration 10G; below cross-over-frequency 57 to 62 Hz; amplitude 0.75 mm; frequency range 10 to 2000 Hz; duration 90 minutes.) Such a vibration will not cause an open switch (no magnetic field present) to close, nor a switch kept closed by an 80 AT coil to open.

Mechanical Strength

The robustness of the terminations is tested in accordance with "IEC 68-2-21", test Ua1 (load 40 N).

Operating and Storage Temperature

Operating ambient temperature; min: -55°C; max: +125°C. Storage temperature; min: -55°; max: +125°C. Note: Temperature excursions up to 150°C may be permissible. For more information contact your nearest Comus Group sales office.

Soldering

The switch can withstand soldering heat in accordance with "IEC 68-2-20", test Tb, method 1B: solder bath

at $350 \pm 10^\circ\text{C}$ for 3.5 ± 0.5 s. Solderability is tested in accordance with "IEC 68-2-20" test Ta, method 3: solder globule temperature 235°C ; ageing 1b: 4 hours steam.

Welding

The leads can be welded.

Mounting

The leads should not be bent closer than 1 mm to the glass-to-metal seals. Stress on the seals should be avoided. Care must be taken to prevent stray magnetic fields from influencing the operating and measuring conditions.

Ordering Information

RI-48GP - XXXX

	<u>AT Ranges</u>
	1520
	2025
<u>Series</u>	2530
	3035
	3540
	4045
	4550
	5055

* As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.